



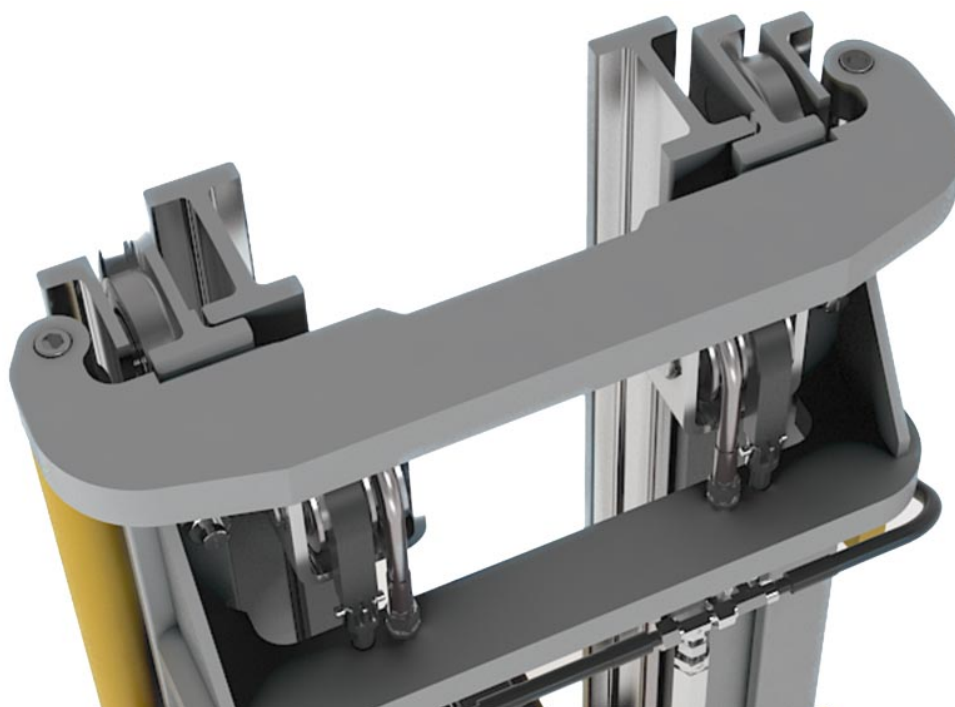

### 材料特性 型号 3019 NbV

- 所有导轨都由优质钢S450 J2级别制成, 长度<sub>最大</sub> 等于 1 2 米
- 磨光型材
- 生产相关的直线度  $\pm 1,0$  mm/米
- 新型NbV-系列, 载荷量高
- 此型材可根据请求提供精密矫直版本 ( $\pm 0,3$  mm/m)。

### 技术图纸 3019 NbV

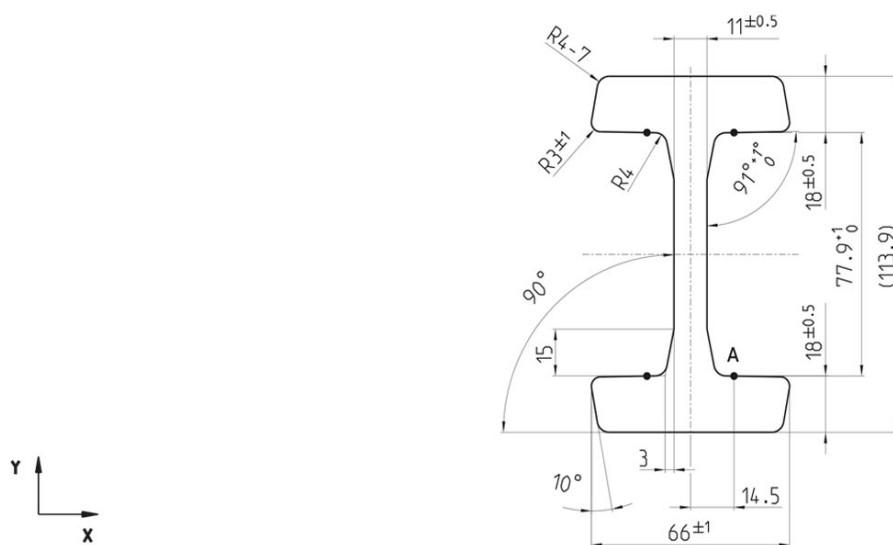

测量点 A



## 抵抗时刻 3019 NbV

| 部件号         | m kg/m | A cm <sup>2</sup> | I <sub>x</sub> cm <sup>4</sup> | W <sub>x</sub> cm <sup>3</sup> | I <sub>y</sub> cm <sup>4</sup> | W <sub>y</sub> cm <sup>3</sup> | L <sub>max</sub> in m |
|-------------|--------|-------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|-----------------------|
| 112.002.000 | 25.3   | 32.30             | 581.90                         | 102.20                         | 77.50                          | 23.50                          | 12                    |

m = 质量, A = 表面, I<sub>x</sub> = 表面力矩, W<sub>x</sub> = 抵抗时刻, I<sub>y</sub> = 表面力矩, W<sub>y</sub> = 抵抗时刻, L<sub>最大</sub> = 最大长度

## 操作视频

标准NbV导轨 校直U型导轨

