





材料特性 型号 PG W-L

- 壁厚坚固的导轨轮廓
- Ready to mount profiles with standardized thread holes
- 材质: S355 J2
- 激光焊接型材
- Suitable for VULKOLLAN® - and POLYAMIDE WINKEL Bearings
- Surface coating according customers drawing
- $L_{\text{最大}}$ = 最大长度 6m

技术图纸 PG W-L

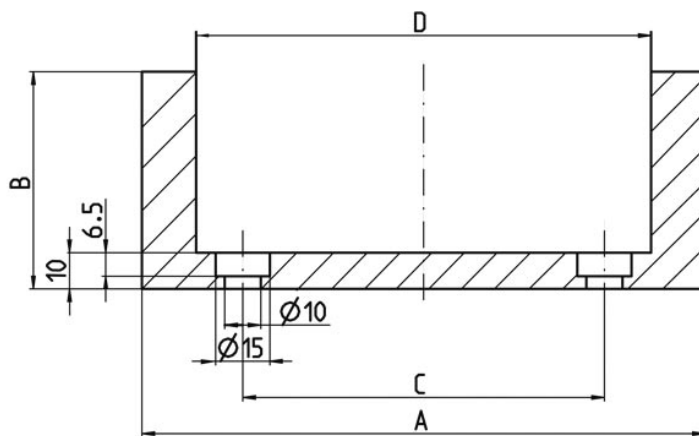

Zeichnungsvorlage für Kundenprofil Drawing for customized profile

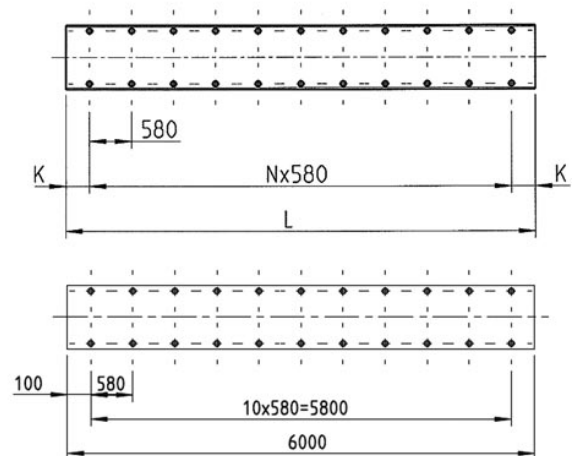



部件号	m kg/m	A [mm]	B ± 1.0 [mm]	C [mm]	D + 1.5 [mm]	L _{max} in m
113.004.020	27.8	174.0	70.0	120.0	144.0	6

m = 质量, A = Total height, B = 总宽度±通行费, C = 宽度滚子推力轴承, D = 辊筒截面尺寸 ± 轴重, L_{最大} = 最大长度