


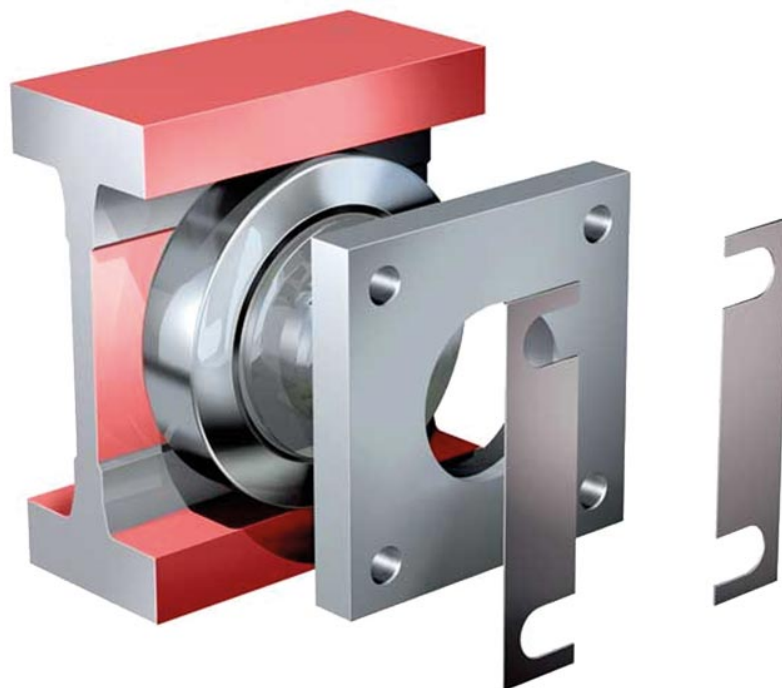


Materiálu zaručeny Typ Standard 28 [beidseitig]

- Welded and milled heavy-duty guide profile, made of high-quality steel in S355 J2
- $L_{\max}$ = maximální délka 12m
- Production-related straightness $\pm 1,0$ mm/meter
- This profile is available as fine straightened style on request ($\pm 0,3$ mm per meter)

- ### Materiálu zaručeny Typ Standard 28 [beidseitig]
- Welded and milled heavy-duty guide profile, made of high-quality steel in S355 J2
 - $L_{\max}$ = maximální délka 12m
 - Production-related straightness $\pm 1,0$ mm/meter
 - This profile is available as fine straightened style on request ($\pm 0,3$ mm per meter)

Technický výkres **Standard 28** [beidseitig]

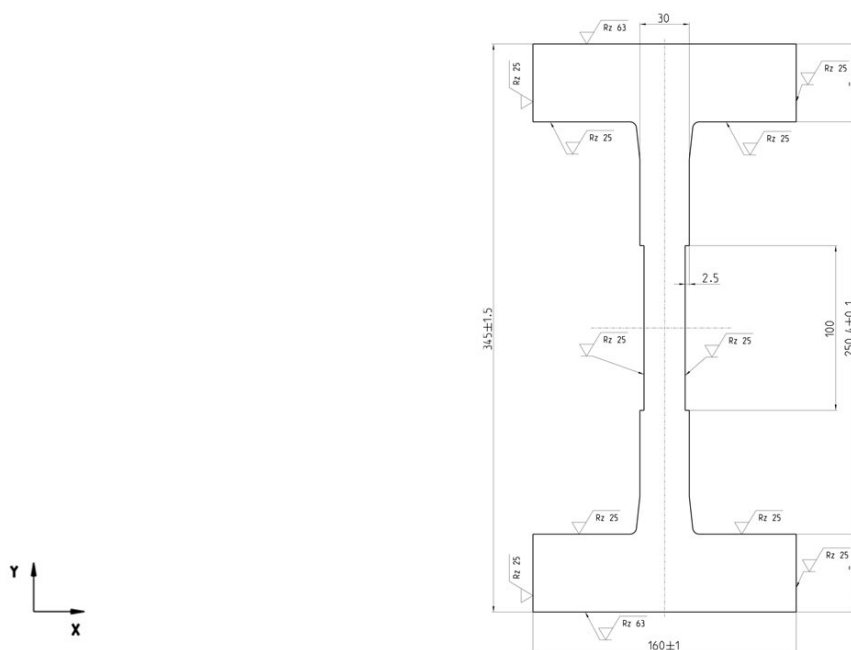



Rozměry Standard 28 [beidseitig]

A ± 1.5 [mm]	B ± 1 [mm]	C [mm]	D ± 0.1 [mm]	E [mm]	F [mm]	L _{max} in m
345,0	160,0	100,0	250,4	30,0	2,5	12

A = Celková výška ± tolerance ±, B = Celková šířka ± tolerance, C = Šířka axiálního ložiska, D = Rozměr komory ložiska ± tolerance, E = Šířka pásu, F = deep tread axial bearing, G = Rozměr profilu, L_{max} = maximální délka

Momenty odporu Standard 28 [beidseitig]

Číslo produktu	m kg/m	A cm ²	I _x cm ⁴	W _x cm ³	I _y cm ⁴	W _y cm ³
112.028.000	175,0	222,70	37.877,00	2.195,80	3.279,10	409,90

m = hmota, A = povrch, I_x = moment povrchu, W_x = moment odporu, I_y = moment povrchu, W_y = moment odporu