





Material properties Type PG-PR 8 NbV

- Profile is made from high-quality steel S450 J2 mod.
- Profile sandblasted and fine straightened $\pm 0,3\text{mm} / \text{m}$
- Min. clearance between bearing and profil
- Higher load capacity with new NbV-series
- L_{max} = Maximum production length 12m

Technical drawing PG-PR 8 NbV

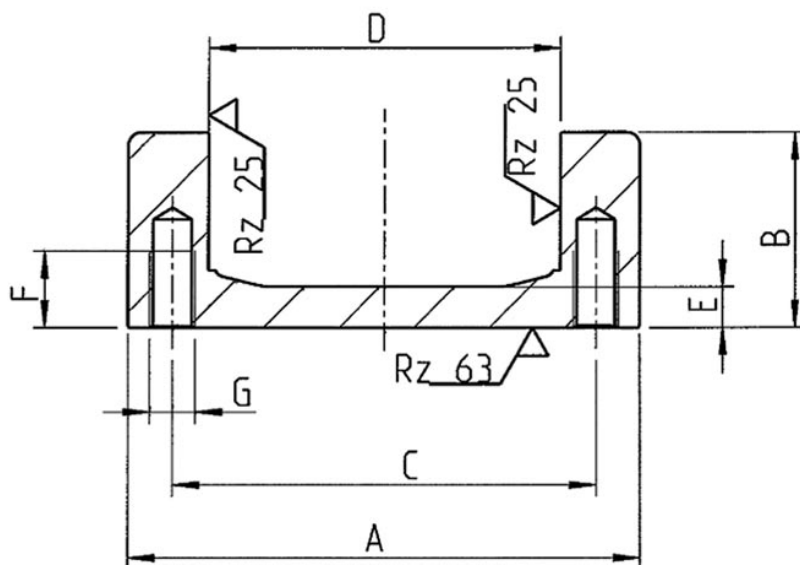

Zeichnungsvorlage für Kundenprofil
Drawing for customized profile

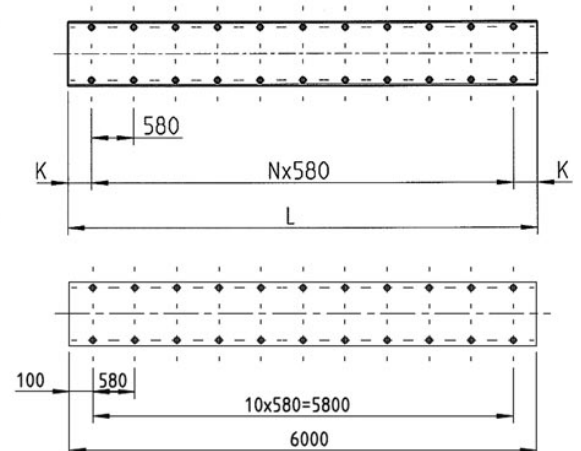



Dimensions **PG-PR 8 NbV**

A ± 2.1 [mm]	B ± 2.2 [mm]	C [mm]	D ± 0.15 [mm]	E [mm]	F [mm]	G	L _{max} in m
252.5	87.0	217.0	185.1	16.4	40.0	M20	12

A = Total height ± tolerance, **B** = Total width ± tolerance, **C** = Width roller axial bearing, **D** = Sectional dimension roller ± tolerance, **E** = Bar width, **F** = Depth of threaded hole, **G** = Thread, **L_{max}** = Maximum production length