



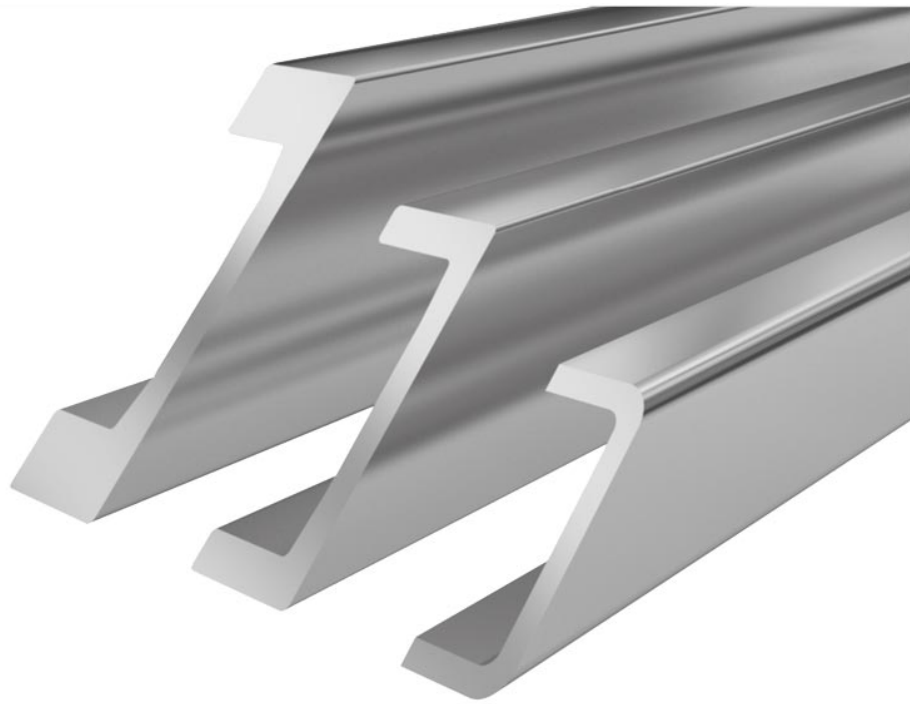

Material properties Type PR 2 NbV

- Profile is made from high-quality steel S450 J2 mod.
- Profile sandblasted and fine straightened $\pm 0,3\text{mm} / \text{m}$
- Higher load capacity with new NbV-series
- Min. clearance between bearing and profil
- L_{max} = Maximum production length 12m

Technical drawing PR 2 NbV

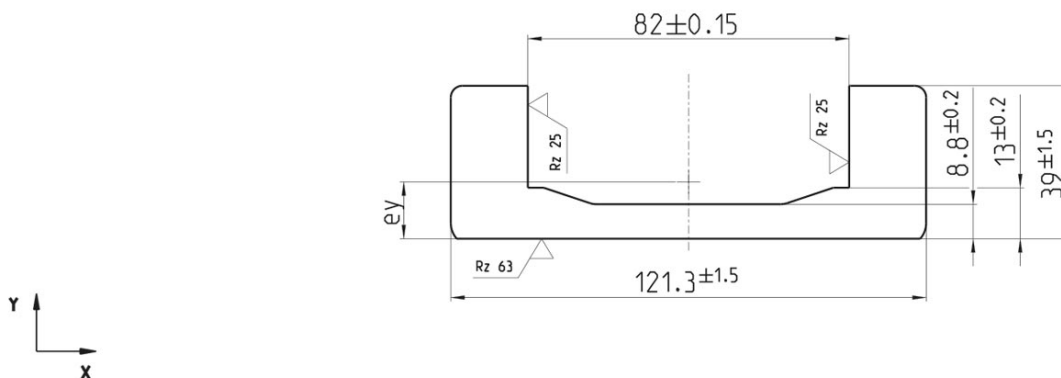



Resistance Moments **PR 2 NbV**

Article number	m kg/m	A cm ²	I _x cm ⁴	W _x cm ³	I _y cm ⁴	W _y cm ³	e _y cm	L _{max} in m
113.012.002	18.3	23.30	31.00	11.70	449.40	74.10	1.40	12

m = mass, **A** = surface, **I_x** = surface moment, **W_x** = resistance moment, **I_y** = surface moment, **W_y** = resistance moment, **e_y** = distance measure of the y-angle, **L_{max}** = Maximum production length