





Material properties Type PG 0 NbV

- Profile is made from high-quality steel S450 J2 mod.
- Profile sandblasted and fine straightened $\pm 0,3\text{mm} / \text{m}$
- Higher load capacity with new NbV-series
- L_{max} = Maximum production length 12m

Technical drawing PG 0 NbV

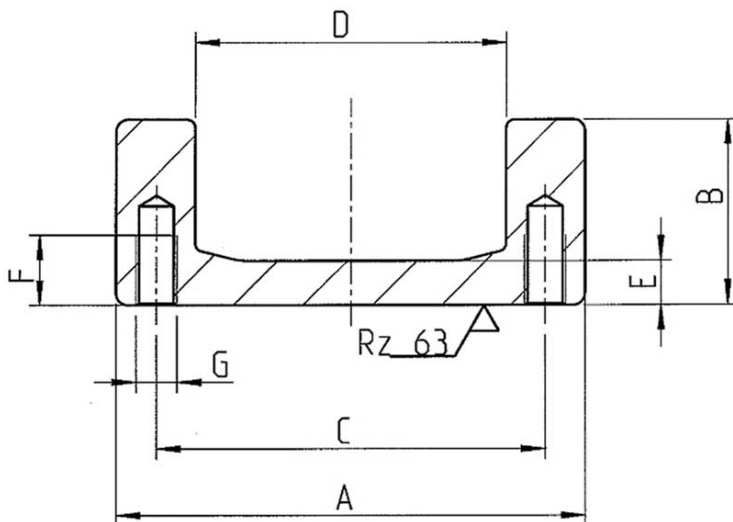

Zeichnungsvorlage für Kundenprofil
Drawing for customized profile

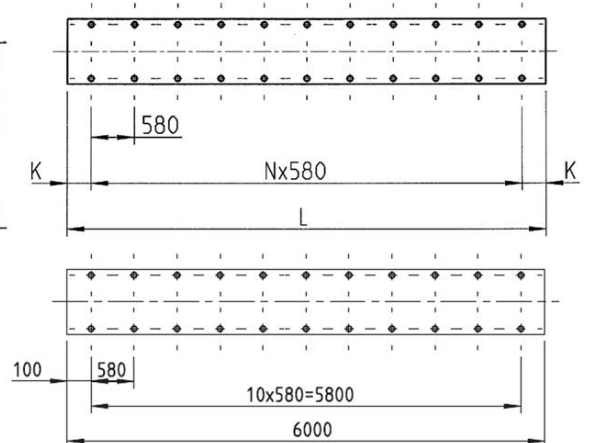



Dimensions **PG 0 NbV**

$A \begin{smallmatrix} +2 \\ -1 \end{smallmatrix}$ [mm]	$B \pm 1.5$ [mm]	C [mm]	$D \pm 0.8$ [mm]	E [mm]	F [mm]	G	$L_{\max}$ in m
86.7	35.0	75.8	62.7	6.0	15.0	M8	12

A = Total height $\pm$ tolerance, **B** = Total width $\pm$ tolerance, **C** = Width roller axial bearing, **D** = Sectional dimension roller $\pm$ tolerance, **E** = Bar width, **F** = Depth of threaded hole, **G** = Thread, **L_{max}** = Maximum production length