



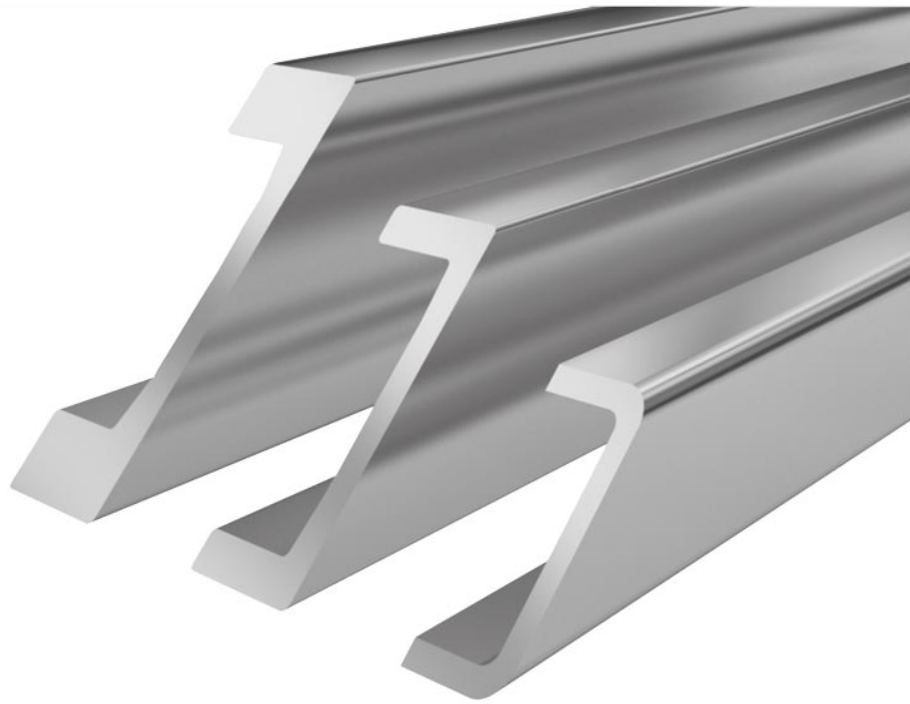

Material properties Type **Standard S**

- In cold rolled version
- Standard profiles are generally sandblasted
- Profile made from high-quality steel in UNI FE 360 B
- Production-related straightness $\pm 1,0$ mm/meter.
- $L_{\max}$ = Maximum production length 12m

Technical drawing **Standard S**

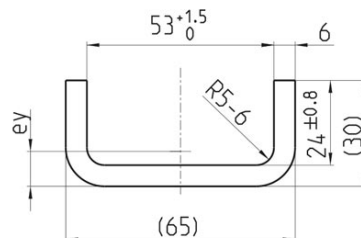



Resistance Moments **Standard S**


Article number	m kg/m	A cm ²	I _x cm ⁴	W _x cm ³	I _y cm ⁴	W _y cm ³	e _y cm	L _{max} in m
113.002.000	5.3	6.40	5.00	2.50	34.90	10.70	1.00	12

m = mass, **A** = surface, **I_x** = surface moment, **W_x** = resistance moment, **I_y** = surface moment, **W_y** = resistance moment, **e_y** = distance measure of the y-angle, **L_{max}** = Maximum production length



Matching Clampflange: **KF S**

Article No. 290.002.000

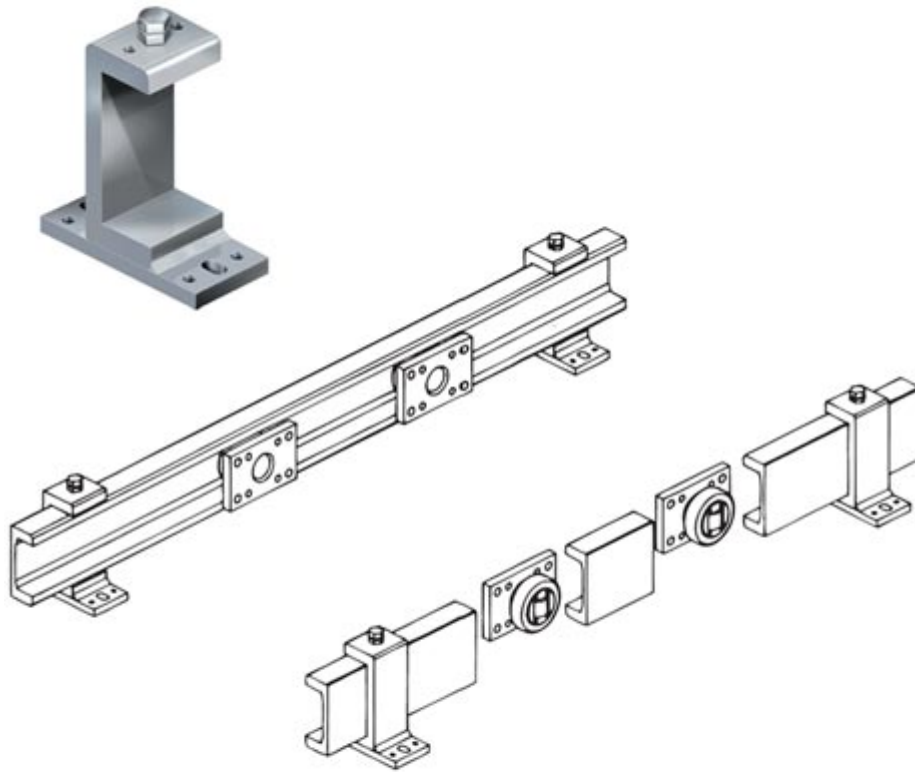

Technical dimensions **Clamp flange KF S**

H	B	L	S	J	e	g	t	a1	d1	M	Gewicht kg
83	50	100	8	67	41	40	8	70	12	M8	0,70

H = Height clamp profile, B = Width clamp flange, L = Length clamp flange, S = mounting flange strength, g = Width clamp profile, t = Strength clamp profile, a1 = Distance pin hole, b1 = Distance pin hole, d1 = Diameter pin hole, d2 = Width slotted hole, d3 = Length slotted hole, e1 = Distance pin hole, M = Thread