




Material properties Type Standard R-L

- Strong-walled, robust guide profile
- Material: S355 J2
- Higher manufacturing precision
- Profiles laser welded
- Suitable for VULKOLLAN®- and POLYAMIDE WINKEL-Bearing system
- Max. delivery length: 6m
- Surface coating according customers drawing

Technical drawing Standard R-L

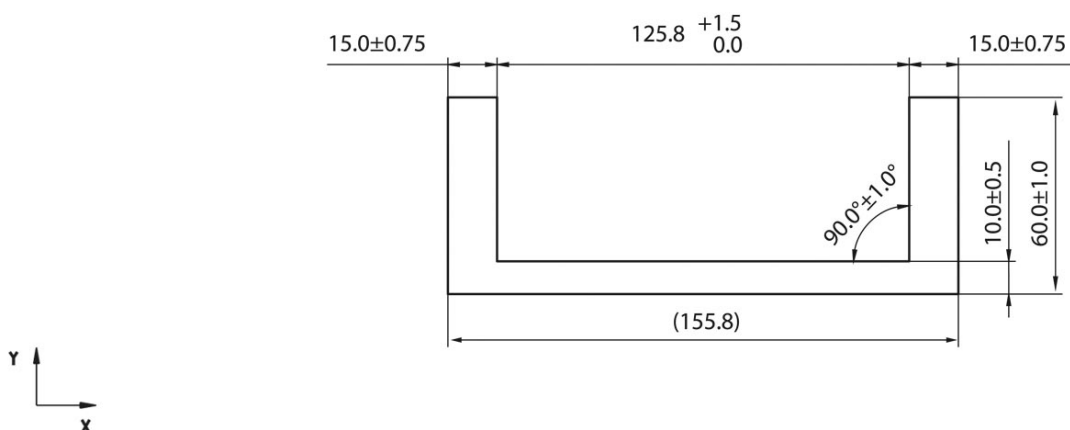



Resistance Moments **Standard R-L**

Article number	m kg/m	A cm ²	I _x cm ⁴	W _x cm ³	I _y cm ⁴	W _y cm ³	e _y cm	L _{max} in m
113.006.010	24.0	30.60	101.30	25.20	1.061.40	135.30	1.97	6

m = mass, **A** = surface, **I_x** = surface moment, **W_x** = resistance moment, **I_y** = surface moment, **W_y** = resistance moment , **e_y** = distance measure of the y-angle , **L_{max}** = Maximum production length