




Material properties Type Standard X-L

- Strong-walled, robust guide profile
- Material: S355 J2
- Higher manufacturing precision
- Profiles laser welded
- Suitable for VULKOLLAN®- and POLYAMIDE WINKEL-Bearing system
- Max. delivery length: 6m
- Surface coating according customers drawing

Technical drawing Standard X-L

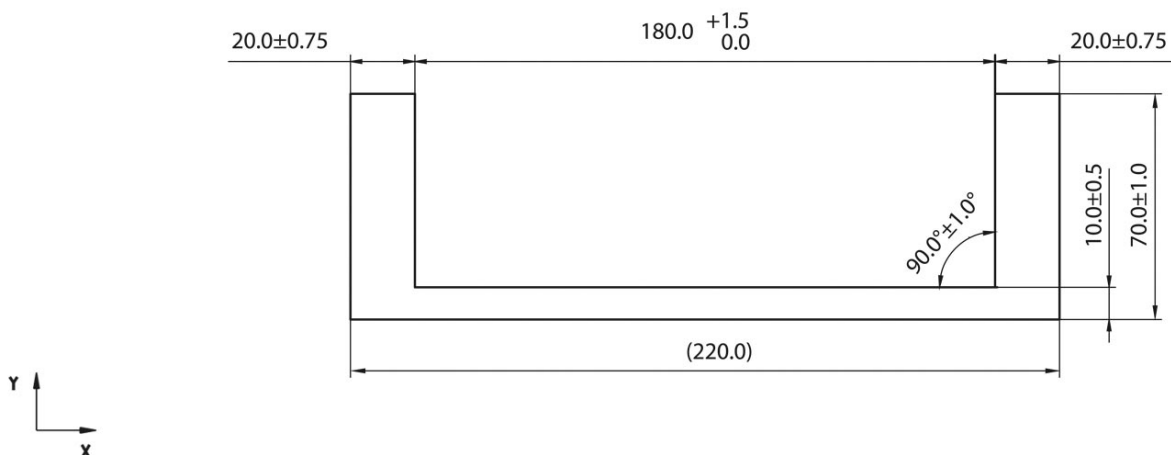



Resistance Moments **Standard X-L**

Article number	m kg/m	A cm ²	I _x cm ⁴	W _x cm ³	I _y cm ⁴	W _y cm ³	e _y cm	L _{max} in m
113.005.010	36.1	46.00	214.40	45.88	3.295.30	299.60	2.33	6

m = mass, **A** = surface, **I_x** = surface moment, **W_x** = resistance moment, **I_y** = surface moment, **W_y** = resistance moment, **e_y** = distance measure of the y-angle, **L_{max}** = Maximum production length