





Material properties Type PG W-L

- Strong-walled, robust guide profile
- Ready to mount profiles with standardized thread holes
- Material: S355 J2
- Profiles laser welded
- Suitable for VULKOLLAN® - and POLYAMIDE WINKEL Bearings
- Surface coating according customers drawing
- L_{max} = Maximum production length 6m

Technical drawing PG W-L

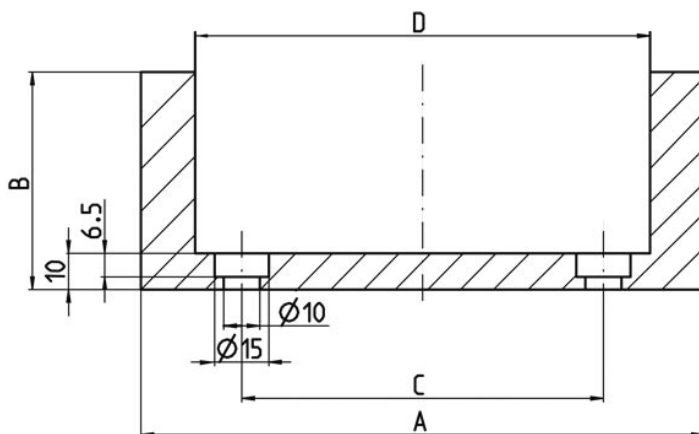

Zeichnungsvorlage für Kundenprofil Drawing for customized profile

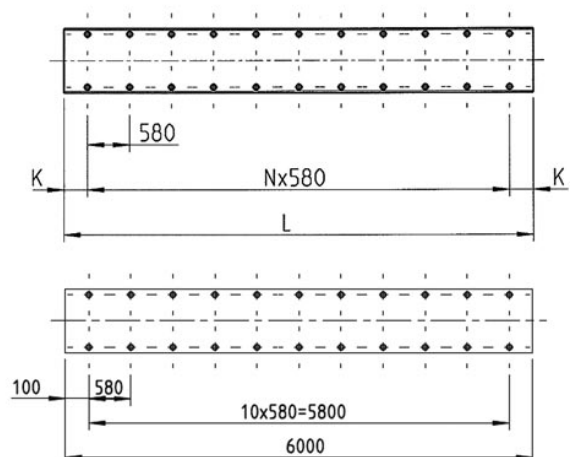



Article number	m kg/m	A [mm]	B ± 1.0 [mm]	C [mm]	D + 1.5 [mm]	L _{max} in m
113.004.020	27.8	174.0	70.0	120.0	144.0	6

m = mass, **A** = Total height, **B** = Total width ± tolerance, **C** = Width roller axial bearing, **D** = Sectional dimension roller ± tolerance, **L_{max}** = Maximum production length