





## Material properties Type PG X-L

- Strong-walled, robust guide profile
- Ready to mount profiles with standardized thread holes
- Material: S355 J2
- Profiles laser welded
- Suitable for VULKOLLAN® - and POLYAMIDE WINKEL Bearings
- Surface coating according customers drawing
- $L_{max}$  = Maximum production length 6m

## Technical drawing PG X-L

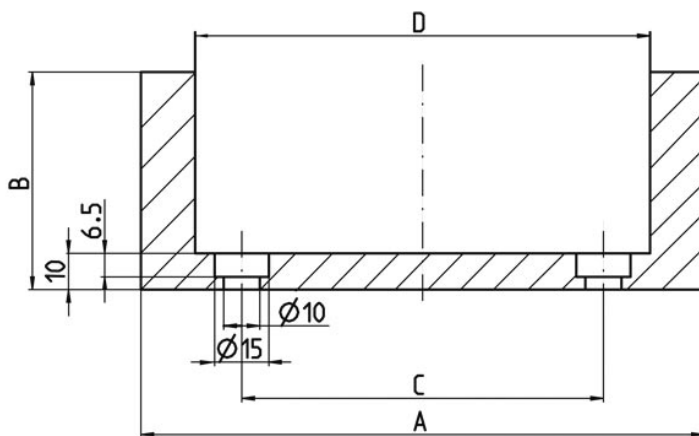

### Zeichnungsvorlage für Kundenprofil Drawing for customized profile

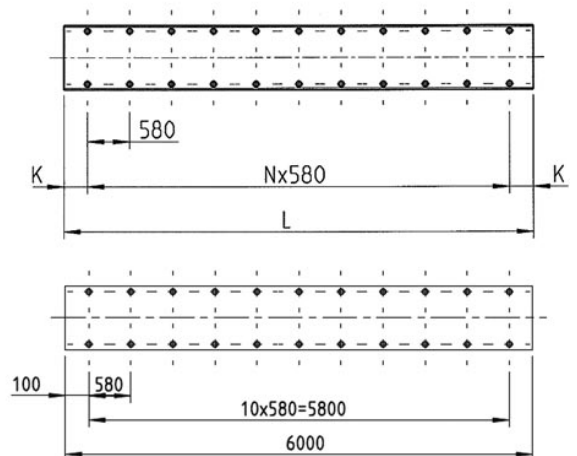



| Article number | m kg/m | A [mm] | B ± 1.0 [mm] | C [mm] | D + 1.5 [mm] | L <sub>max</sub> in m |
|----------------|--------|--------|--------------|--------|--------------|-----------------------|
| 113.005.020    | 36.1   | 220.0  | 70.0         | 150.0  | 180.0        | 6                     |

**m** = mass, **A** = Total height, **B** = Total width ± tolerance, **C** = Width roller axial bearing, **D** = Sectional dimension roller ± tolerance, **L<sub>max</sub>** = Maximum production length